



**TRILUX**  
SIMPLIFY YOUR LIGHT.

**twenty3**

feel free.  
twenty3

**EVERYDAY WORK MADE MORE EASY**

**LIGHTING SOLUTIONS FOR OFFICE, INDUSTRY AND OUTDOOR**



All details about twenty3 online!  
[trilux-twenty3.com](https://trilux-twenty3.com)

**Product overview 2025/2026**

# Everyday work made more easy

TRILUX twenty3 makes it easy for you: the innovative LED lighting is the ideal solution for your daily business, providing more flexibility and ease every step of the way. Thanks to state-of-the-art technology, rapid installation and a top price-performance ratio, it's ready to go and brings efficiency to your work processes.




## Feel Simplicity

Mounting and installation is quick, easy and tool-free thanks to intelligently designed technology and practical details. Use existing mounting points and save valuable time – regardless of whether it's a new build or a 1:1 luminaire refurbishment.



## Feel Quality

High-quality materials and innovative technology make our ENEC-certified luminaires not only exceedingly efficient, but also ensure a solid, reliable service life. And the best thing is that our 5-year guarantee provides long-term security and an all-round good feeling!

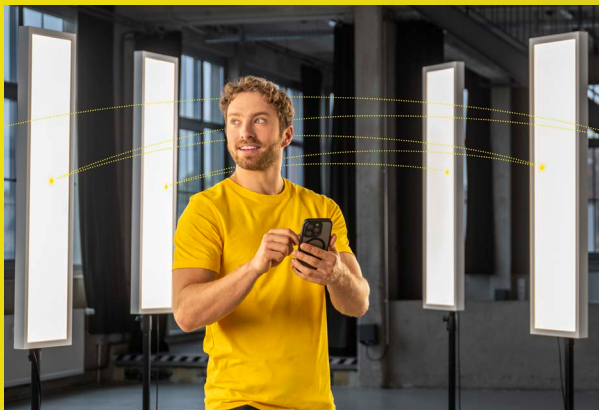


## Feel Connectivity

Some of the TRILUX twenty3 luminaires feature intelligent light management: thanks to twenty3 Wireless Connect, all lighting components can be wirelessly networked and conveniently controlled via app – perfect for refurbishments as well.



## Feel Flexibility

Different requirements? No problem! TRILUX twenty3 gives you complete flexibility even during installation. Thanks to the combination of Multilumen and Multicolour technology, ALL IN luminaires combine several luminaire luminous flux levels and light colours that can be individually set on the luminaire.

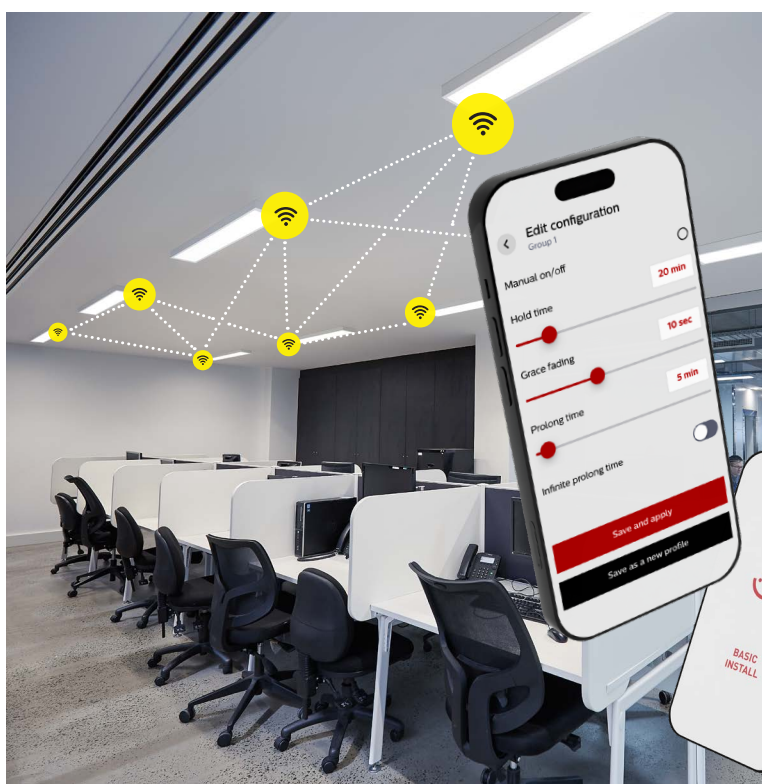

### Wireless Connect – wireless lighting management


The use of lighting management systems allows you to get the most out of your lighting in terms of efficiency and economy. Energy consumption and operating costs are reduced, while the service life of the luminaires is extended.

With twenty3 Wireless Connect, these benefits are particularly easy to realize: No additional cabling is required and the entire system can be conveniently controlled via app.

**Save up to 55%  
on energy costs  
and use for 7 years longer.**

Compared to using  
twenty3 lights without  
Wireless Connect.

# TRILUX twenty3 LED luminaires

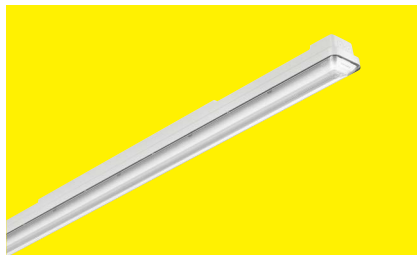

## 2310

LED weather-proof luminaire

- Car parks
- Storage areas
- Production areas
- Canopied outdoor areas



### Dimensions (L x W x H):

1,200: 1,257 x 102 x 91 mm  
1,500: 1,552 x 102 x 91 mm

### Luminaire luminous flux:

1,200: 6,000 lm, 4,000 lm  
1,500: Multilumen:  
6,000 lm / 4,000 lm, 8,000 lm

### Colour rendering/temperature:

Ra > 80 / 4,000 K

### Connected load:

49/35 W, 35 W, 42 W, 54 W

### Protection rating, safety class:

IP66 / IK08, safety class I

### Weight:

1,200: 2.3 kg  
1,500: 2.6 kg

### Service life:

50.000 h (L70)



## 2315 G4

LED weather-proof luminaire

- Car parks
- Storage areas
- Production areas
- Canopied outdoor areas



### Dimensions (L x W x H):

1,200: 1,233 x 60.5 x 60 mm  
1,500: 1,533 x 60.5 x 60 mm  
Version with through-wiring  
(+LV): L= 1,270 / 1,570 mm

### Luminaire luminous flux:

Multilumen:  
1,200: 3,800 lm / 2,600 lm  
1,500: 5,600 lm / 3,800 lm

### Colour rendering/temperature:

Ra > 80  
Multicolour: 4,000 K / 6,500 K

### Connected load:

48/33 W, 32/22 W

### Protection rating, safety class:

IP65 / IK08, safety class I

### Weight:

1,200: 1.3/1.6 kg, 1,500: 1.4/1.7 kg

### Service life:

50.000 h (L70)



## 2325 G3

Planar LED downlight

- Reception areas
- Hotels and restaurants
- Sales areas and showrooms
- Corridors



### Dimensions:

Ø 170 x 43 mm  
Ø 230 x 43 mm

### Luminaire luminous flux:

Multilumen:  
2,000 lm / 1,400 lm / 800 lm

### Colour temperature:

Multicolour: 3,000 K / 4,000 K

### Connected load:

19/13/8 W

### Protection rating:

IP20 / IP44 (on room side) / IK02

### Safety class:

II

### Weight:

0.4 kg, 0.5 kg

### Service life:

50.000 h (L70)




# Discover all the details online!



## 2330 G3

LED recessed luminaire

- Corridors
- Foyers
- Offices and VDU workstations
- Conference rooms

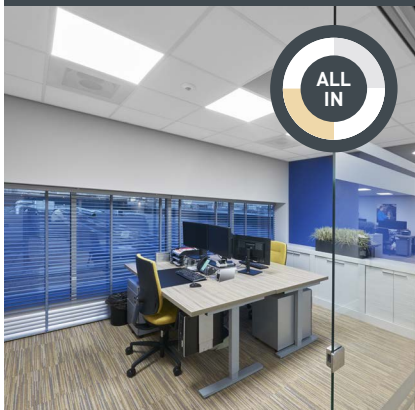

**Dimensions (L x W x H):**

620 x 620 x 34 mm

**Luminaire luminous flux:**

Multilumen: 3,600 lm / 2,900 lm

**Colour rendering/temperature:**

Ra > 80

Multicolour: 3,000 K, 4,000 K

**Connected load:**

31/24 W

**Protection rating, safety class:**

IP20 / IK02, SK I

**Weight:**

2.2 kg

**Service life:**


50.000 h (L70)



## 2340 G2

LED wall luminaire and ceiling luminaire

- Corridors
- Stairwells
- Entrance areas
- Recreation rooms

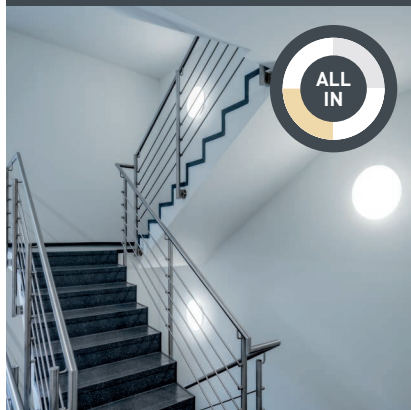

**Dimensions:**

WD1: Ø 330 x 85 mm

WD2: Ø 400 x 88 mm

**Luminaire luminous flux:**

Multilumen:

WD1: 1,400 lm / 800 lm

WD2: 2,200 lm / 1,600 lm

**Colour temperature:**

Multicolour: 3,000 K / 4,000 K

**Connected load:**

12/8 W, 19/14 W

**Protection rating, safety class:**

IP20 / IK02, SK I

**Weight:**

0.6 kg, 0.9 kg

**Service life:**

50.000 h (L70)



## 2345 G2

LED wall luminaire and ceiling luminaire IP65

- Corridors and stairways
- Entrance areas
- Humid environments
- Canopied outdoor areas



**Dimensions:**

Ø 300 x 85 mm

**Luminaire luminous flux:**

Multilumen:

2,000 lm / 1,400 lm / 1,000 lm

**Colour temperature:**

Multicolour: 3,000 K / 4,000 K

**Connected load:**

19/12/9 W

**Protection rating, safety class:**


IP65 / IK10, safety class II

**Weight:**

0.8 kg

**Service life:**

50.000 h (L70)

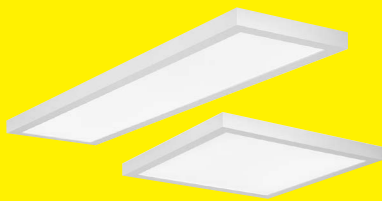

## 2350 G4

LED surface-mounted luminaire

- Offices
- Corridors and foyers
- Conference rooms
- Sales areas



### Dimensions (L x W x H):

D: 602 x 602 x 50 mm  
D2: 1,202 x 302 x 50 mm  
D3: 1,502 x 302 x 50 mm

### Luminaire luminous flux:

Multilumen:  
D: 3,600 lm / 2,900 lm  
D2: 4,000 lm / 3,000 lm  
D3: 6,000 lm / 4,000 lm

### Colour rendering/temperature:

Ra > 80  
Multicolour: 3,000 K / 4,000 K

### Connected load:

D: 28/22 W, D2: 31/23 W  
D3: 46/31 W

### Protection rating, safety class:

IP20 / IK02, SK I

### Weight:

D: 2.8 kg, D2: 3.4 kg, D3: 4.2 kg

### Service life:


50.000 h (L80)



## 2360 G2

LED suspended luminaire

- Offices
- Conference rooms
- Banks
- Schools and educational institutions

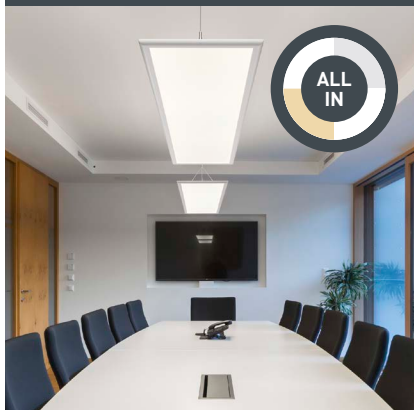

### Dimensions (L x W x H):

H1: 1,200 x 300 x 20 mm  
H2: 1,500 x 300 x 20 mm

### Luminaire luminous flux:

Multilumen:  
H1: 4,400 lm / 3,400 lm  
H2: 6,000 lm / 4,700 lm

### Colour rendering/temperature:

Ra > 80  
Multicolour: 3,000 K / 4,000 K

### Connected load:

34/26 W  
46/36 W

### Protection rating, safety class:

IP20 / IK02, SK II

### Weight:

H1: ET 5.3 kg, ETDD: 5.5 kg  
H2: ET 5.8 kg, ETDD: 6.0 kg

### Service life:


50.000 h (L70)



## 2370

LED post-top luminaire

- Traffic roads
- Factory roads
- Cycle paths and footpaths
- Parking lots

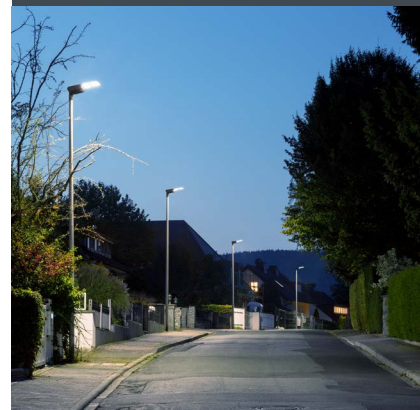

### Dimensions (L x W x H):

488 x 287 x 103 mm  
705 x 331 x 113 mm

### Luminaire luminous flux:

Multilumen:  
7,500 lm / 4,200 lm / 1,800 lm  
20,000 lm / 15,000 lm / 10,000 lm

### Colour temperature:

3,000 K, 4,000 K

### Connected load:

60/34/13 W  
165/113/73 W

### Protection rating, safety class:

IP66, SK II

### Weight:

4.3 kg, 7.1 kg

### Service life:

75.000 h (L80)

☀ Multilumen

🔄 Multicolour

📶 Wireless Connect

🔗 LiveLink Ready



## 2375

LED post-top luminaire

- Residential streets
- Parking lots
- Pedestrian zones
- Cycle paths and footpaths



#### Dimensions:

Ø 300 x 450 mm

#### Luminaire luminous flux:

Multilumen: 5,000 lm / 3,200 lm

#### Colour temperature:

Multicolour: 3,000 K / 4,000 K

#### Connected load:

35/22 W

#### Protection rating, safety class:

IP66 / IK08, SK II

#### Weight:

4.4 kg

#### Service life:

50.000 h (L80)



## 2380 G4

LED highbay luminaire

- Trade fair and exhibition halls
- Manufacturing facilities
- Warehouses
- Humid environments



#### Dimensions:

Ø 290 x 167 mm

Ø 320 x 167 mm

#### Luminaire luminous flux:

Multilumen:

20,000 lm / 15,000 lm / 12,000 lm

30,000 lm / 25,000 lm / 20,000 lm

#### Colour temperature:

Multicolour: 4,000 K / 6,500 K

#### Connected load:

125 / 89 / 67 W

187 / 150 / 120 W

#### Protection rating, safety class:

IP65 / IK08, safety class I

#### Weight:

2.7 kg, 3.5 kg

#### Service life:

50.000 h (L70)



## 2390 G2

LED projector

- Outdoor facilities
- Building sites
- Harbour and shipping facilities
- Warehousing and container areas



#### Dimensions (L x W x H):

Klein: 241 x 309 x 48 mm

Mittel: 361 x 399 x 59 mm

Groß: 419 x 449 x 61 mm

#### Luminaire luminous flux:

Multilumen:

Klein: 5,000 / 3,000 / 2,000 lm

Mittel: 15,000 / 10,000 / 8,000 lm

Groß: 25,000 / 20,000 / 15,000 lm

#### Colour temperature:

Multicolour: 3,000 K / 4,000 K

#### Connected load:

Small: 40/22/14 W

Medium: 120/73/56 W

Large: 160/126/90 W

#### Protection rating, safety class:

IP65 / IK08, safety class I

#### Weight:

1.5 kg, 4.2 kg, 5.7 kg

#### Service life:

50.000 h (L80)

# All **twenty3** variants

|                                                                                     | Product reference                       |                                                                                                                                                                         | TOC        | Description                        |
|-------------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------|
| 2310                                                                                | 2310 12 B 40-840 ET PC                  |                                                                                                                                                                         | 79 227 40  | Weather-proof luminaire            |
|                                                                                     | 2310 12 B 40-840 ET                     |                                                                                                                                                                         | 79 228 40  | Weather-proof luminaire            |
|                                                                                     | 2310 12 B 60-840 ET PC                  |                                                                                                                                                                         | 6000652840 | Weather-proof luminaire            |
|                                                                                     | 2310 15 B 40/60/ML-840 ET PC            | *                                                                                                                                                                       | 79 229 40  | Weather-proof luminaire            |
|                                                                                     | 2310 15 B 40/60/ML-840 ET               | *                                                                                                                                                                       | 79 230 40  | Weather-proof luminaire            |
|                                                                                     | 2310 15 B 80-840 ET PC                  |                                                                                                                                                                         | 6000652940 | Weather-proof luminaire            |
|                                                                                     | 2310 ZLV/525/12                         |                                                                                                                                                                         | 79 231 00  | Through-wiring, accessories        |
|                                                                                     | 2310 ZLV/525/15                         |                                                                                                                                                                         | 79 232 00  | Through-wiring, accessories        |
| 2315                                                                                | 2315 G4 1200 38/26/ML-8MC ET PC         | *                                                                                      | 84 274 40  | Weather-proof luminaire            |
|                                                                                     | 2315 G4 1500 55/38/ML-8MC ET PC         | *                                                                                      | 84 275 40  | Weather-proof luminaire            |
|                                                                                     | 2315 G4 1200 38/26/ML-8MC ET PC +LV     | *                                                                                      | 84 276 40  | Weather-proof luminaire            |
|                                                                                     | 2315 G4 1500 55/38/ML-8MC ET PC +LV     | *                                                                                      | 84 277 40  | Weather-proof luminaire            |
| 2325                                                                                | 2325 G3 C05 0A LED 20/14/08/ML-8MC ET   | *                                                                                      | 77 911 40  | Planar downlight                   |
|                                                                                     | 2325 G3 C07 0A LED 20/14/08/ML-8MC ET   | *                                                                                      | 77 912 40  | Planar downlight                   |
|                                                                                     | 2325 G3 C05 SP 200                      |                                                                                                                                                                         | 81 206 00  | Refurbishment ring, accessories    |
|                                                                                     | 2325 G3 C07 SP 250                      |                                                                                                                                                                         | 81 205 00  | Refurbishment ring, accessories    |
| 2330                                                                                | 2330 G3 M73 PW19 36/29/ML-840 ET        | *                                                                                                                                                                       | 76 319 40  | Recessed Luminaire                 |
|                                                                                     | 2330 G3 M73 PW19 36/29/ML-865 ET        | *                                                                                                                                                                       | 77 677 40  | Recessed Luminaire                 |
|                                                                                     | 2330 G3 M73 PW19 36/29/ML-8MC ET        | *                                                                                      | 77 985 40  | Recessed Luminaire                 |
|                                                                                     | 2330 G3 M73 PW19 3600-8MC ETDD          |       | 77 986 51  | Recessed Luminaire                 |
|                                                                                     | 2330 G3 M73 PW19 3600-8MC ETWD          |       | 88 802 65  | Recessed Luminaire                 |
|                                                                                     | 2330 G3 ZH/M73 M84                      |                                                                                                                                                                         | 77 164 00  | Suspension accessories             |
| 2340                                                                                | 2340 G2 WD1 LED 14/08/ML-8MC ET         | *                                                                                      | 77 901 40  | Wall and ceiling luminaire         |
|                                                                                     | 2340 G2 WD1 LED 14/08/ML-8MC ET+HFS     | *                                                                                      | 77 902 40  | Wall and ceiling luminaire         |
|                                                                                     | 2340 G2 WD2 LED 22/16/ML-8MC ET         | *                                                                                      | 77 903 40  | Wall and ceiling luminaire         |
|                                                                                     | 2340 G2 WD2 LED 22/16/ML-8MC ET+HFS     | *                                                                                      | 77 904 40  | Wall and ceiling luminaire         |
| 2345                                                                                | 2345 G2 WD1 20/14/10/ML-8MC ET          | *                                                                                     | 77 906 40  | Wall and ceiling luminaire IP65    |
|                                                                                     | 2345 G2 WD1 20/14/10/ML-8MC ET+HFS      | *                                                                                    | 77 908 40  | Wall and ceiling luminaire IP65    |
| 2350                                                                                | 2350 G4 D PW19 36/29/ML-8MC ET          | *                                                                                    | 85 372 40  | Square surface-mounted luminaire   |
|                                                                                     | 2350 G4 D PW19 3600-8MC ETWD            |   | 85 379 65  | Square surface-mounted luminaire   |
|                                                                                     | 2350 G4 D2 PW19 40/30/ML-8MC ET         | *                                                                                    | 85 373 40  | Long surface-mounted luminaire     |
|                                                                                     | 2350 G4 D2 PW19 4000-8MC ETDD           |   | 85 374 51  | Long surface-mounted luminaire     |
|                                                                                     | 2350 G4 D2 PW19 4000-8MC ETWD           |   | 85 377 65  | Long surface-mounted luminaire     |
|                                                                                     | 2350 G4 D3 PW19 60/40/ML-8MC ET         | *                                                                                    | 85 375 40  | Long surface-mounted luminaire     |
|                                                                                     | 2350 G4 D3 PW19 6000-8MC ETDD           |   | 85 376 51  | Long surface-mounted luminaire     |
|                                                                                     | 2350 G4 D3 PW19 4400-8MC ETWD           |   | 85 378 65  | Long surface-mounted luminaire     |
| 2360                                                                                | 2360 G2 H1 PW19-IL 34/44/ML-8MC ET      | *                                                                                    | 89 090 40  | Suspended luminaire                |
|                                                                                     | 2360 G2 H1 PW19-IL 4400-8MC ETDD        |   | 89 091 51  | Suspended luminaire                |
|                                                                                     | 2360 G2 H2 PW19-IL 47/60/ML-8MC ET      | *                                                                                    | 89 092 40  | Suspended luminaire                |
|                                                                                     | 2360 G2 H2 PW19-IL 6000-8MC ETDD        |   | 89 093 51  | Suspended luminaire                |
| 2370                                                                                | 2370 AB21L/18/42/75/ML-730 ET 26        | *                                                                                                                                                                       | 82 605 40  | Post-top luminaire                 |
|                                                                                     | 2370 AB21L/18/42/75/ML-740 ET 26        | *                                                                                                                                                                       | 82 606 40  | Post-top luminaire                 |
|                                                                                     | 2370 AB21L/100/150/200/ML-730 ET 26     | *                                                                                                                                                                       | 82 607 40  | Post-top luminaire                 |
|                                                                                     | 2370 AB21L/100/150/200/ML-740 ET 26     | *                                                                                                                                                                       | 82 608 40  | Post-top luminaire                 |
|                                                                                     | 2370/42 REDUCER                         |                                                                                                                                                                         | 84 344 00  | Mounting accessories               |
| 2375                                                                                | 2375 AB21L/32/50-7MC 1G1W ET            | *                                                                                    | 84 257 40  | Post-top luminaire                 |
|                                                                                     | 2375 RB7L/32/50-7MC 1G1W ET             | *                                                                                    | 84 258 40  | Post-top luminaire                 |
|                                                                                     | 2375/42 REDUCER                         |                                                                                                                                                                         | 98 283 00  | Mounting accessories               |
| 2380                                                                                | 2380 G3 TB 10000-840 ET                 |                                                                                                                                                                         | 79 594 40  | Highbay luminaire                  |
|                                                                                     | 2380 G3 TB 20000-840 ET                 |                                                                                                                                                                         | 79 592 40  | Highbay luminaire                  |
|                                                                                     | 2380 G3 TB 30000-840 ET                 |                                                                                                                                                                         | 79 593 40  | Highbay luminaire                  |
|                                                                                     | 2380 G3 HF SENSOR                       |                                                                                                                                                                         | 79 595 00  | Sensor, accessories                |
|                                                                                     | 2380 G3 HF SENSOR RMC                   |                                                                                                                                                                         | 79 596 00  | Sensor remote control, accessories |
| 2390                                                                                | 2390 G2 AM9L 20/30/50/ML-8MC 1G1W ET    | *                                                                                    | 84 207 40  | Projector                          |
|                                                                                     | 2390 G2 AM9L 80/100/150/ML-8MC 1G1W ET  | *                                                                                    | 84 208 40  | Projector                          |
|                                                                                     | 2390 G2 AM9L 150/200/250/ML-8MC 1G1W ET | *                                                                                    | 84 209 40  | Projector                          |
|                                                                                     | 2390 HF SENSOR                          |                                                                                                                                                                         | 76 412 00  | Sensor, accessories                |
|  | Wireless Connect system components      |                                                                                                                                                                         |            |                                    |
|                                                                                     | LMS 23 EasyAir 4B Switch                |                                                                                                                                                                         | 79 184 00  | Wireless push-button               |
|                                                                                     | LMS 23 Sensor EasyAir Occu-DL Z6P       |                                                                                                                                                                         | 79 183 00  | Wireless sensor unit               |



Multilumen



Multicolour



Wireless Connect



LiveLink Ready

5 YEAR  
GUARANTEE

All details about  
**twenty3** online!



trilux-twenty3.com

25/32-GH-EN-INT