



TRILUX
SIMPLIFY YOUR LIGHT.

twenty3



QUALITY FOR EVERY DAY

Product overview 2024/2025

5
YEAR
GUARANTEE




twenty3 goes ALL IN!

More options in day-to-day business.


Thanks to the combination of **multi-lumen and multi-colour technology**, ALL IN luminaires combine several luminaire luminous fluxes and light colours that can be adjusted on the luminaire.

In some cases, this means that even more lighting options are available with fewer products. This allows retailers to optimize storage space without having to reduce the range.

Electrical contractors benefit from maximum flexibility in their day-to-day business. Luminous intensity and light colour can be adapted to local conditions and customer needs during installation.



Multilumen technology The luminaire luminous flux can be switched in two or three stages on the luminaire. This allows the light to be optimally adapted to individual requirements.



Multicolour technology Warm white or cool white? With multicolour luminaires, this question only needs to be answered during installation. The light colour can be adjusted on the luminaire.



For us, ALL IN means: Multilumen and Multicolour combined in one luminaire.



All details:
trilux-twenty3.com



Sustainable, durable, intelligent.



Sustainable renovation with twenty3

Refurbishment to modern LED luminaires can significantly reduce energy consumption. This protects the environment and reduces operating costs.


For sustainable twenty3 luminaire types, the CO₂ emissions are verified and offset.



5 year guarantee

TRILUX twenty3 stands for quality in day-to-day business. We now guarantee this quality for even longer: a 5-year guarantee on the twenty3 portfolio*.

*Applies to orders from 24.4.2024. The warranty conditions of TRILUX GmbH & Co. KG apply.

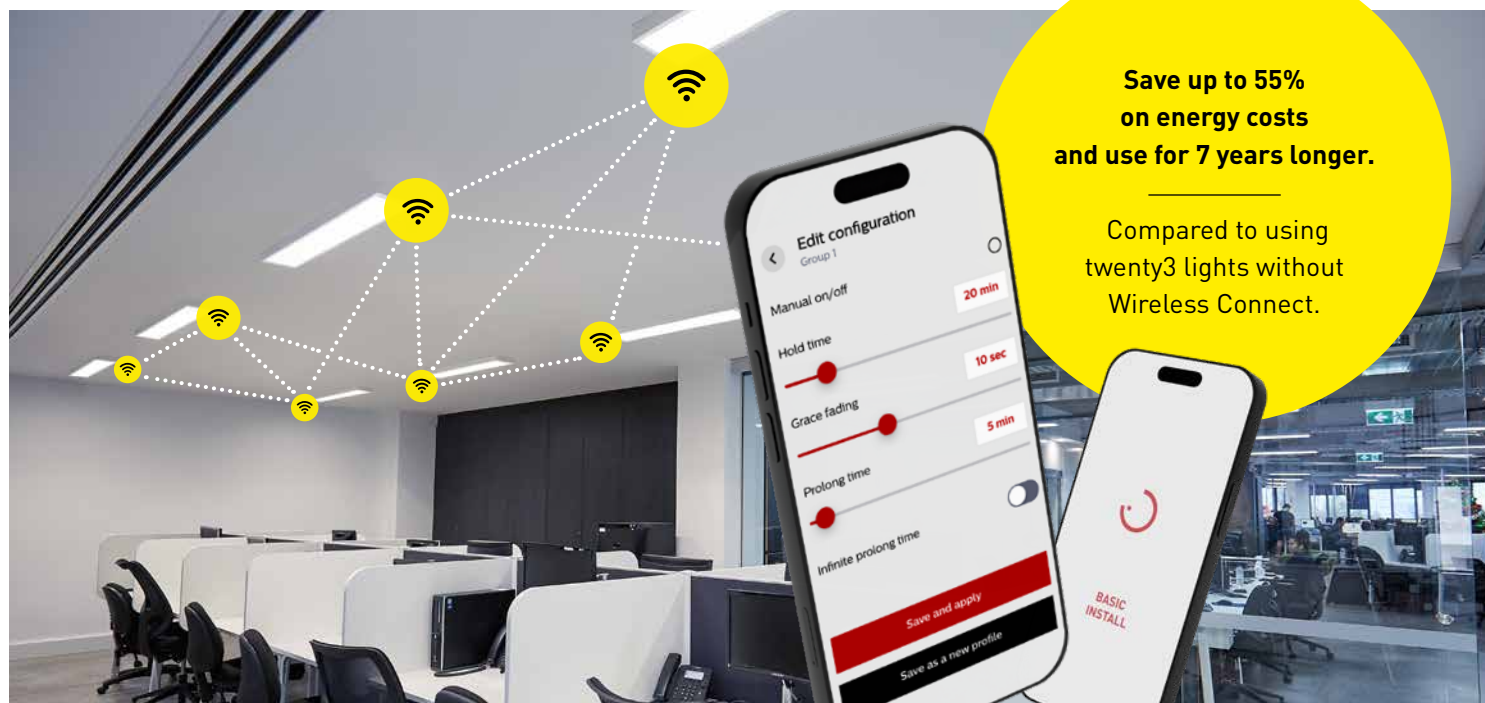

**Save up to 55%
on energy costs
and use for 7 years longer.**


Compared to using
twenty3 lights without
Wireless Connect.

Wireless Connect – wireless lighting management

The use of lighting management systems allows you to get the most out of your lighting in terms of efficiency and economy. Energy consumption and operating costs are reduced, while the service life of the luminaires is extended.

With twenty3 Wireless Connect, these benefits are particularly easy to realize: No additional cabling is required and the entire system can be conveniently controlled via app.

TRILUX twenty3 LED luminaires

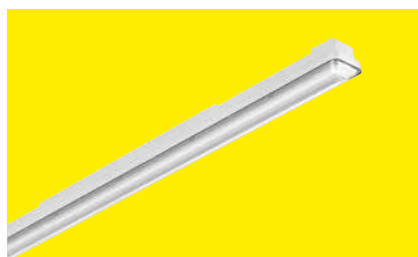

2310

LED weather-proof luminaire

- Car parks
- Storage areas
- Production areas
- Canopied outdoor areas



Dimensions (L x W x H):

1200: 1,257 x 102 x 91 mm
1500: 1,552 x 102 x 91 mm

Luminaire luminous flux:

1200: 4,000 lm
1500: Multilumen: 6,000 lm,
4,000 lm

Colour rendering/temperature:

Ra > 80 / 4000 K

Connected load:

33 W, 33/23 W

Protection rating, safety class:

IP66 / IK08, safety class I

Weight:

1200: 2.3 kg
1500: 2.6 kg



2315 G4

LED weather-proof luminaire

- Car parks
- Storage areas
- Production areas
- Canopied outdoor areas



Dimensions (L x W x H):

1200: 1,233 x 60.5 x 60 mm
1500: 1,533 x 60.5 x 60 mm
Version with through-wiring
(+LV): L= 1,270 / 1,570 mm

Luminaire luminous flux:

1200: Multilumen: 3,800 lm,
2,600 lm
1500: Multilumen: 5,600 lm,
3,800 lm

Colour rendering/temperature:

Ra > 80
Multicolour: 4,000 K, 6,500 K

Connected load:

48/33 W, 32/22 W

Protection rating, safety class:

IP65 / IK08, safety class I

Weight:

1200: 0.9 kg,
1500: 1.1 kg



2325 G3

Planar LED downlight

- Reception areas
- Hotels and restaurants
- Sales areas and showrooms
- Corridors



Dimensions:

Ø 170 x 43 mm
Ø 230 x 43 mm

Luminaire luminous flux:

Multilumen: 2,000 lm, 1,400 lm,
800 lm

Colour temperature:

3,000 K, 4,000 K
Multicolour: 3,000 K, 4,000 K

Connected load:

19/13/8 W

Protection rating:

IP20 / IP44 (on room side) / IK02

Safety class:

II

Weight:

0.4 kg, 0.5 kg



Discover all the details online!



2330 G3

LED insert light

- Corridors
- Foyers
- Offices and VDU workstations
- Conference rooms



Dimensions (L x W x H):

595 x 595 x 34 mm

Luminaire luminous flux:

Multilumen: 3,600 lm, 2,900 lm

Colour rendering/temperature:

Ra > 80

Multicolour: 3,000 K, 4,000 K

Connected load:

31/24 W

Protection rating, safety class:

IP20 / IK02, SK I

Weight:


2.2 kg



2340 G2

LED wall luminaire and ceiling luminaire

- Corridors
- Stairwells
- Entrance areas
- Recreation rooms

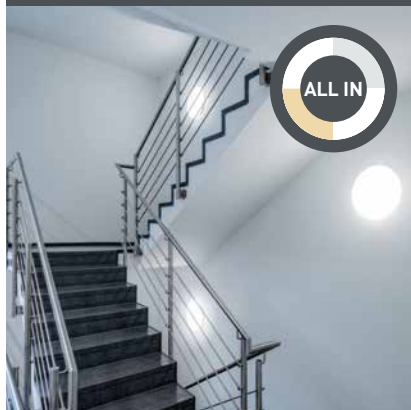

Dimensions:

WD1: Ø 330 x 85 mm

WD2: Ø 400 x 88 mm

Luminaire luminous flux:

WD1: Multilumen: 1,400 lm, 800 lm

WD2: Multilumen: 2,200 lm, 1,400 lm

Colour temperature:

Multicolour: 3,000 K, 4,000 K

Connected load:

12/8 W, 19/14 W

Protection rating, safety class:

IP20 / IK02, SK I

Weight:

0.6 kg, 0.9 kg



2345 G2

LED wall light and ceiling light IP65

- Corridors and stairways
- Entrance areas
- Humid environments
- Canopied outdoor areas



Dimensions:

Ø 300 x 85 mm

Luminaire luminous flux:

Multilumen: 2,000 lm, 1,400 lm, 1,000 lm

Colour temperature:

Multicolour: 3,000 K, 4,000 K

Connected load:


19/12/9 W

Protection rating, safety class:

IP65 / IK10, safety class II

Weight:

0.8 kg

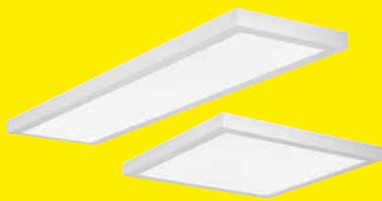

2350 G4

LED surface-mounted luminaire

- Offices
- Corridors and foyers
- Conference rooms
- Sales areas



Dimensions (L x W x H):

D: 602 x 602 x 50 mm
D2: 1,202 x 302 x 50 mm
D3: 1,502 x 302 x 50 mm

Luminaire luminous flux:

D: Multilumen: 3,600 lm, 2,900 lm
D2: Multilumen: 4,000 lm, 3,000 lm
D3: Multilumen: 6,000 lm, 4,000 lm

Colour rendering/temperature:

Ra > 80
Multicolour: 3,000 K, 4,000 K

Connected load:

D: 33/25 W, D2: 36/30 W
D3: 54/38 W

Protection rating | safety class:

IP20 / IK02, SK I

Weight:

D: 2.8 kg, D2: 3.4 kg, D3: 4.2 kg



2360 G2

LED suspended luminaire

- Offices
- Conference rooms
- Banks
- Schools and educational institutions



Dimensions (L x W x H):

H1: 1,200 x 300 x 20 mm
H2: 1,500 x 300 x 20 mm

Luminaire luminous flux:

Multilumen: 4,400 lm, 3,400 lm
Multilumen: 6,000 lm, 4,700 lm

Colour rendering/temperature:

Ra > 80
Multicolour: 3,000 K, 4,000 K

Connected load:

34/26 W
46/36 W

Protection rating, safety class:

IP20 / IK02, SK II

Weight:


H1: ET 5.3 kg, ETDD: 5.5 kg
H2: ET 5.8 kg, ETDD: 6.0 kg



2370

LED post-top luminaire

- Traffic roads
- Factory roads
- Cycle paths and footpaths
- Parking lots

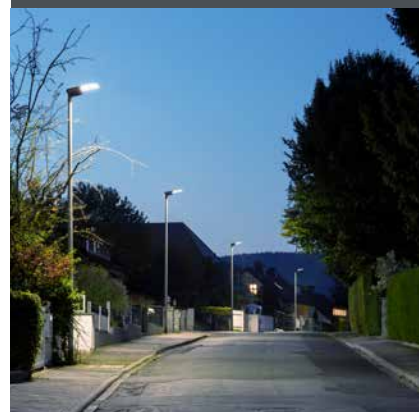

Dimensions (L x W x H):

488 x 287 x 103 mm
705 x 331 x 113 mm

Luminaire luminous flux:

Multilumen: 7,500 lm, 4,200 lm, 1,800 lm
Multilumen: 20,000 lm, 15,000 lm, 10,000 lm

Colour temperature:

3,000 K, 4,000 K

Connected load:

62/35/15 W
166/125/83 W

Protection rating, safety class:

IP66, SK II

Weight:

4.3 kg, 7.1 kg

2375

LED post-top luminaire



- Residential streets
- Parking lots
- Pedestrian zones
- Cycle paths and footpaths



Dimensions:
Ø 300 x 475 mm

Luminaire luminous flux:
Multilumen: 5,000 lm / 3,200 lm

Colour temperature:
Multicolour: 3,000 K / 4,000 K

Connected load:
42/30 W

Protection rating, safety class:
IP66 / IK08, SK II

Weight:
4.2 kg

2375 available from Q1/2025

2380 G3

LED highbay luminaire



- Trade fair and exhibition halls
- Manufacturing facilities
- Warehouses
- Humid environments



Dimensions:
Ø 270 x 160 mm
Ø 310 x 170 mm

Luminaire luminous flux:
10,000 lm, 20,000 lm, 30,000 lm

Colour temperature:
4,000 K

Connected load:
77 W, 150 W, 230 W

Protection rating, safety class:
IP65 / IK08, safety class I

Weight:
2.3 kg, 2.7 kg, 3.5 kg

2390 G2

LED projector



- Outdoor facilities
- Building sites
- Harbour and shipping facilities
- Warehousing and container areas



Dimensions (L x W x H):
Small: 241 x 309 x 48 mm
Medium: 361 x 399 x 59 mm
Large: 419 x 449 x 61 mm

Luminaire luminous flux:
Multilumen:
Small: 5,000, 3,000, 2,000 lm
Medium: 15,000, 10,000, 8,000 lm
Large: 25,000, 20,000, 15,000 lm

Colour temperature:
Multicolour: 3,000 K, 4,000 K

Connected load:
Small: 40/22/14 W
Medium: 120/73/56 W
Large: 160/126/90 W

Protection rating, safety class:
IP65 / IK08, safety class I

Weight:
1.5 kg, 4.2 kg, 5.7 kg

All **twenty3** variants

	Product reference		TOC	Description
2310	2310 12 B 40-840 ET PC		79 227 40	Weather-proof luminaire
	2310 12 B 40-840 ET		79 228 40	Weather-proof luminaire
	2310 15 B 40/60/ML-840 ET PC	*	79 229 40	Weather-proof luminaire
	2310 15 B 40/60/ML-840 ET	*	79 230 40	Weather-proof luminaire
	2310 ZLV/525/12		79 231 00	Through-wiring, accessories
	2310 ZLV/525/15		79 232 00	Through-wiring, accessories
2315	2315 G4 1200 38/26/ML-8MC ET PC	* 	84 274 40	Weather-proof luminaire
	2315 G4 1500 55/38/ML-8MC ET PC	* 	84 275 40	Weather-proof luminaire
	2315 G4 1200 38/26/ML-8MC ET PC +LV	* 	84 276 40	Weather-proof luminaire
	2315 G4 1500 55/38/ML-8MC ET PC +LV	* 	84 277 40	Weather-proof luminaire
	2315 G4 S 1200 38/26/ML-840 ET PC +LV	* 	84 287 40	Weather-proof luminaire
	2315 G4 S 1500 55/38/ML-840 ET PC +LV	* 	84 288 40	Weather-proof luminaire
2325	2325 G3 C05 0A LED 20/14/08/ML-8MC ET	* 	77 911 40	Planar downlight
	2325 G3 C07 0A LED 20/14/08/ML-8MC ET	* 	77 912 40	Planar downlight
	2325 G3 C05 S 0A LED 20/14/08/ML-840 ET	* 	77 909 40	Planar downlight
	2325 G3 C07 S 0A LED 20/14/08/ML-840 ET	* 	77 910 40	Planar downlight
	2325 G3 C05 SP 200		81 206 00	Renovation ring, accessories
	2325 G3 C07 SP 250		81 205 00	Renovation ring, accessories
2330	2330 G3 M73 PW19 36/29/ML-840 ET	*	76 319 40	Lay-in luminaire
	2330 G3 M73 PW19 36/29/ML-865 ET	*	77 677 40	Lay-in luminaire
	2330 G3 M73 PW19 36/29/ML-8MC ET	* 	77 985 40	Lay-in luminaire
	2330 G3 M73 PW19 3600-8MC ETDD + safety cable	 	77 986 51	Insert light incl. fuse
	2330 G3 M73 PW19 3600-8MC ETWD+ safety cable	 	88 802 65	Insert light incl. fuse
	2330 G3 S M73 PW19 36/29/ML-840 ET	* 	83 328 40	Lay-in luminaire
2340	2340 G2 WD1 LED 14/08/ML-8MC ET	* 	77 901 40	Wall and ceiling luminaire
	2340 G2 WD1 LED 14/08/ML-8MC ET+HFS	* 	77 902 40	Wall and ceiling luminaire
	2340 G2 WD2 LED 22/16/ML-8MC ET	* 	77 903 40	Wall and ceiling luminaire
	2340 G2 WD2 LED 22/16/ML-8MC ET+HFS	* 	77 904 40	Wall and ceiling luminaire
2345	2345 G2 WD1 20/14/10/ML-8MC ET	* 	77 906 40	Wall and ceiling luminaire IP65
	2345 G2 WD1 20/14/10/ML-8MC ET+HFS	* 	77 908 40	Wall and ceiling luminaire IP65
2350	2350 G4 D PW19 36/29/ML-8MC ET	* 	85 372 40	Recessed luminaire square
	2350 G4 D PW19 3600-8MC ETWD	 	85 379 65	Recessed luminaire square
	2350 G4 D2 PW19 40/30/ML-8MC ET	* 	85 373 40	Long surface-mounted light
	2350 G4 D2 PW19 4000-8MC ETDD	 	85 374 51	Long surface-mounted light
	2350 G4 D2 PW19 4000-8MC ETWD	 	85 377 65	Long surface-mounted light
	2350 G4 D3 PW19 60/40/ML-8MC ET	* 	85 375 40	Long surface-mounted light
	2350 G4 D3 PW19 6000-8MC ETDD	 	85 376 51	Long surface-mounted light
	2350 G4 D3 PW19 4400-8MC ETWD	 	85 378 65	Long surface-mounted light
2360	2360 G2 H1 PW19-IL 34/44/ML-8MC ET	* 	89 090 40	Suspended luminaire
	2360 G2 H1 PW19-IL 4400-8MC ETDD	 	89 091 51	Suspended luminaire
	2360 G2 H2 PW19-IL 47/60/ML-8MC ET	* 	89 092 40	Suspended luminaire
	2360 G2 H2 PW19-IL 6000-8MC ETDD	 	89 093 51	Suspended luminaire
2370	2370 AB21L/18/42/75/ML-730 ET 26	*	82 605 40	Post luminaire
	2370 AB21L/18/42/75/ML-740 ET 26	*	82 606 40	Post luminaire
	2370 AB21L/100/150/200/ML-730 ET 26	*	82 607 40	Post luminaire
	2370 AB21L/100/150/200/ML-740 ET 26	*	82 608 40	Post luminaire
	2370/42 REDUCER		84 344 00	Mounting accessories
2375	2375 AB21L/32/50-7MC 1G1W ET	* 	84 257 40	Post luminaire
	2375 RB7L/32/50-7MC 1G1W ET	* 	84 258 40	Post luminaire
	2375/42 REDUCER		98 283 00	Mounting accessories
2380	2380 G3 TB 10000-840 ET		79 594 40	Highbay projector
	2380 G3 TB 20000-840 ET		79 592 40	Highbay projector
	2380 G3 TB 30000-840 ET		79 593 40	Highbay projector
	2380 G3 HF SENSOR		79 595 00	Sensor, accessories
	2380 G3 HF SENSOR RMC		79 596 00	Sensor remote control, accessories
2390	2390 G2 AM9L 20/30/50/ML-8MC 1G1W ET	* 	84 207 40	Projector
	2390 G2 AM9L 80/100/150/ML-8MC 1G1W ET	* 	84 208 40	Projector
	2390 G2 AM9L 150/200/250/ML-8MC 1G1W ET	* 	84 209 40	Projector
	2390 HF SENSOR		76 412 00	Sensor, accessories
	Wireless Connect system components			
	LMS 23 EasyAir 4B Switch		79 184 00	Radio switch
	LMS 23 Sensor EasyAir Occu-DL ZGP		79 183 00	Wireless sensor



Wireless Connect



LiveLink Ready



Multicolour



Multilumen



CO₂ emissions offset

All **details** about
twenty3 online!



trilux-twenty3.com

24/46-GH-GB-int.